

SPECIAL ORDER

Solid Carbide Milling

PRIMOALUR™

JOB-103 | 07/2026 | Page 1/1

► 3-Flute SCEMs For Roughing Aluminum Alloys

N

1 INSTRUCTIONS

Option 1: Fill out this form digitally, save, and email to your local Ingersoll rep.

Option 2: Print form, hand-write your responses, and return to your local Ingersoll rep.

2 CONTACT INFORMATION ►

Date

Contact Name

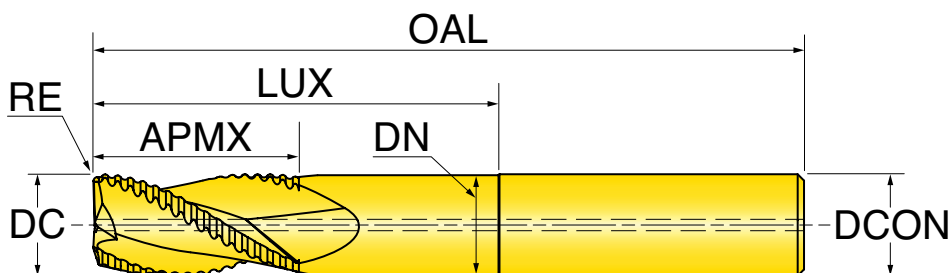
Company

Industry

Phone

Email

Ingersoll / Distributor Rep

**3 TOOL SPECIFICATIONS ▼** All tools feature coolant thru

Item	Workpiece Material	Quantity Required	Units	DC Cutting Dia.	RE Radius	APMX Depth of Cut Max.	LUX Usable Length Max.	OAL Overall Length	DN Neck Dia.	DCON Shank Dia.	Shank Style
1			inch mm								Cylindrical Weldon LockSFeed*
2			inch mm								Cylindrical Weldon LockSFeed*
3			inch mm								Cylindrical Weldon LockSFeed*
4			inch mm								Cylindrical Weldon LockSFeed*
5			inch mm								Cylindrical Weldon LockSFeed*

Additional Notes ►

*Compatible with
SAFE-LOCK®
by HAIMER.