

SPECIAL ORDER

Solid Carbide Milling

PRIMOALUF™

JOB-104 | 07/2026 | Page 1/1

► 3-Flute SCEMs For Finishing Aluminum Alloys

N

1 INSTRUCTIONS

Option 1: Fill out this form digitally, save, and email to your local Ingersoll rep.

Option 2: Print form, hand-write your responses, and return to your local Ingersoll rep.

2 CONTACT INFORMATION ►

Date

Contact Name

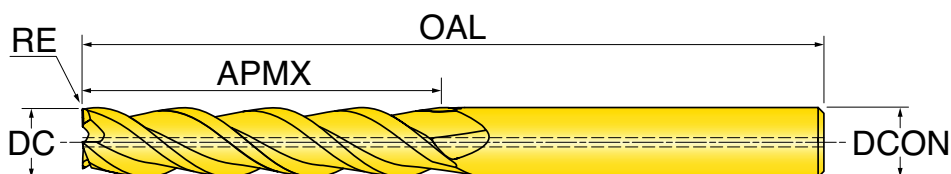
Company

Industry

Phone

Email

Ingersoll / Distributor Rep

**3 TOOL SPECIFICATIONS ▼** Coolant through available for Ø.250" and larger

Item	Workpiece Material	Quantity Required	Units	DC Cutting Dia.	RE Radius	APMX Depth of Cut Max.	OAL Overall Length	DCON Shank Dia.	Shank Style
1			inch mm						Cylindrical Weldon LockSFeed*
2			inch mm						Cylindrical Weldon LockSFeed*
3			inch mm						Cylindrical Weldon LockSFeed*
4			inch mm						Cylindrical Weldon LockSFeed*
5			inch mm						Cylindrical Weldon LockSFeed*

Additional Notes ►

*Compatible with
SAFE-LOCK®
by HAIMER.