

SPECIAL ORDER

Solid Carbide Milling

PRIMOSS^V

JOB-105 | 07/2026 | Page 1/1

► 4-Flute SCEMs For Various
Stainless Steel Operations**1 INSTRUCTIONS**

Option 1: Fill out this form digitally, save, and email to your local Ingersoll rep.

Option 2: Print form, hand-write your responses, and return to your local Ingersoll rep.

2 CONTACT INFORMATION ►

NOTE: If needed, include workpiece and/or application drawings for your rep to clarify intended use.

Date

Contact Name

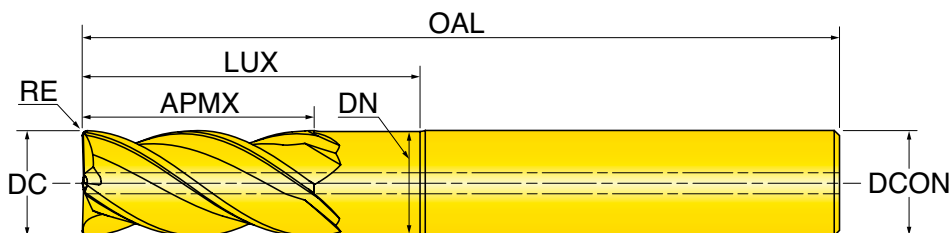
Company

Industry

Phone

Email

Ingersoll / Distributor Rep

**3 TOOL SPECIFICATIONS ▼** Coolant through available for Ø.250" and larger

Item	Workpiece Material	Quantity Required	Units	DC Cutting Dia.	RE Radius	APMX Depth of Cut Max.	LUX Usable Length Max.	OAL Overall Length	DN Neck Dia.	DCON Shank Dia.	Shank Style
1			inch mm								Cylindrical Weldon LockSFeed*
2			inch mm								Cylindrical Weldon LockSFeed*
3			inch mm								Cylindrical Weldon LockSFeed*
4			inch mm								Cylindrical Weldon LockSFeed*
5			inch mm								Cylindrical Weldon LockSFeed*

Additional
Notes ►

*Compatible with
SAFE-LOCK®
by HAIMER.