

SPECIAL ORDER

Solid Carbide Milling

PRIMOSS^H

JOB-106 | 07/2026 | Page 1/1

► 5- and 6-Flute SCEMs For
HEM of Stainless steel**1 INSTRUCTIONS**

Option 1: Fill out this form digitally, save, and email to your local Ingersoll rep.

Option 2: Print form, hand-write your responses, and return to your local Ingersoll rep.

2 CONTACT INFORMATION ►

Date

Contact Name

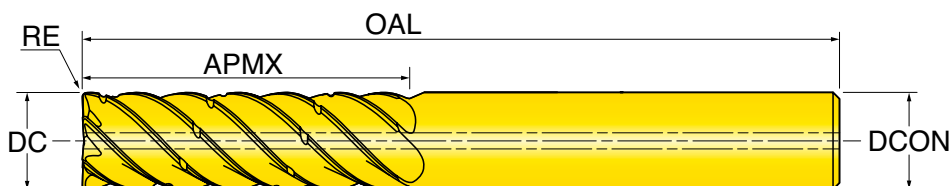
Company

Industry

Phone

Email

Ingersoll / Distributor Rep

**3 TOOL SPECIFICATIONS ▼** Coolant through available for Ø.3125" and larger

Item	Workpiece Material	Quantity Required	Units	Number of Flutes	DC Cutting Dia.	RE Radius	APMX Depth of Cut Max.	OAL Overall Length	DCON Shank Dia.	Shank Style
1			inch mm	5 6						Cylindrical Weldon LockSFeed*
2			inch mm	5 6						Cylindrical Weldon LockSFeed*
3			inch mm	5 6						Cylindrical Weldon LockSFeed*
4			inch mm	5 6						Cylindrical Weldon LockSFeed*
5			inch mm	5 6						Cylindrical Weldon LockSFeed*

Additional
Notes ►

*Compatible with
SAFE-LOCK®
by HAIMER.