


7 mm • Operating Guidelines

CHIP THINNING

When a_e is less than 25%,
Chip Thinning Calculator
is recommended to ensure
 h_{max} is within f_z range. ▶

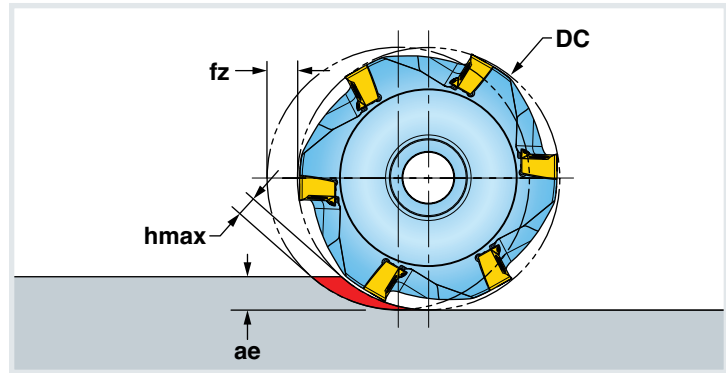

ISO	Material Group #VDI 3323	Type	Examples	Vc Cutting Speed SFM	fz* Feed/Tooth (inch)	Harder «----» Tougher				Coolant
						IN2504	IN2510	IN2505	IN2530	
P	1-5	Non-Alloy Steel	1018, A36, 1045, A572, 1070	400-1000	.003-.008	3	-	2	1	No
	6-9	Low-Alloy Steel	4140, 4340, P20, 8620, 300M	350-700						
	10-11	High-Alloy Steel	H13, A2, D2, M2, T1	300-600						
M	12-13	Stainless Steel (ferritic & martensitic)	410, 416, 440	350-600	.003-.006	-	-	2	1	No
	14	Stainless Steel (austenitic)	303, 304, 316, 15-5, 17-4	300-550						May not be required at high speeds
K	15-16	Gray Cast Iron	CLS. 20, 30, 45	500-1000	.003-.008	2	1	-	-	No
	17-18	Nodular Cast Iron	60-40-18, 100-70-03	400-800						
S	31-35	High-Temp Alloys	Inconel, Hastelloy, Nimonic, Monel	65-120	.003-.006	-	-	1	2	Yes
	36-37	Titanium Alloys	6Al-4V, 5Al-5Mo-5V-3Cr	85-130						
H	38-39	Hardened Steel > 48	A2, 01, D2	130-250	.003-.005	1	-	-	-	No

Note: Feed and speed recommendations are starting operating parameters. They are only guidelines from which further optimization should take place. Operating parameters are influenced by many machining variables. These variables may cause for reductions in feeds and speed or dramatic increases. Additionally, DOC and WOC may need to be revised to optimize the tools performance.