



TEDISFEED

MILLING PRODUCTS



TXGPA PCD Insert Geometries: 01/02 (finishing)

0 1/02 (111115111119) 05 /************

05 (roughing)

45 (medium roughing)

07 (semi-finishing)

09 (gasket retention)

Shell Mills:

Inch 2.00"-5.00" Metric 50 mm-125 mm

Cylindrical Shank End Mills:

Inch 1.5" Metric 40 mm

Monoblock Mills:

Metric 63 mm- 100 mm

Member IMC Group ®

High Number of PCD Cutting Edges for High Productivity!

Features & Benefits:

- High rigidity double clamping system to support High-Feed machining
- Up to .016" total axial adjustment to ensure an excellent surface finish
- Multiple cutting edge geometries to cover any application, including 90° and 75° lead angle
- 1.5" (40mm) available in cylindrical shank
- 2.0-5.0" (50mm-125mm) range in shell mill or monoblock bodies
- DOC capability of .157" (4mm)
- Ability to re-tip cartridges








INTRODUCTION


During CNC machining the cycle time is very important. To improve the productivity, while maintaining a perfect surface finish, IT.TE.DI. is now introducing the TEDISFEED line with a higher number of cutting edges.




The fundamental characteristic, due to the high performance during the process, is the maintaining of the rigidity and stability of the mill and of its components. So, to have those aspects with the high number of cutting edges, we developed a special design cutting edge pack.




When the screw is clamped, it pushes the cartridge towards the mill's body; once the conical wedge has also been placed in its seat and it has been clamped, it further pushes the cartridge, thus locking it into place and proving better stability.



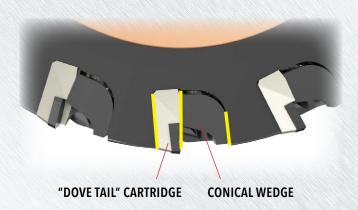



The precise height is guaranteed from the regulation of the adjusting wedge, that is placed below the cartridges. This product line also offers different cutting edge geometries to satisfy the customers requirements.



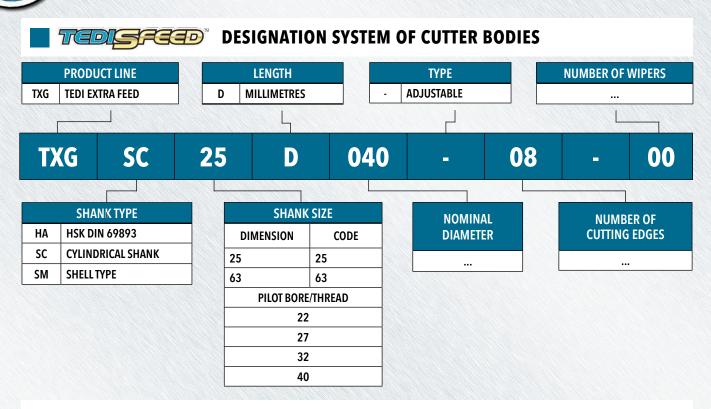

TEDESTATE SHELL MILL WITH AXIAL ADJUSTMENT





	Part Number ¹	DC (75°) Cutting Diameter	DC (90°) Cutting Diameter	DCX (75°) Cutting Diameter Max.	OAL Overall Length	ZEFF Eff. Teeth	Holder Shape	DCON Shank Diameter	BMC Body Material Code	ltem
	TXGSM22I020-10-00	1.94	2	2	2.17	10	А	22 mm	Steel	2742926
	TXGSM22I025-13-00	2.44	2.5	2.5	2.17	13	В	22 mm	Steel	2742927
NC.	TXGSM27I030-16-00	2.94	3	3	2.28	16	А	27 mm	Steel	2742928
	TXGSM32I040-22-00	3.94	4	4	2.28	22	А	32 mm	Aluminum & Steel	2742929
	TXGSM40I050-28-00	4.94	5	5	2.28	28	А	40 mm	Aluminum & Steel	2742930
	TXGSM22D050-10-00	48.6	50	50	55	10	В	22 mm	Steel	2742926
ں	TXGSM22D063U13-00	61.6	63	63	55	13	А	22 mm	Steel	2747098
METRIC	TXGSM27D080U16-00	78.6	80	80	58	16	А	27 mm	Steel	2747099
≥	TXGSM32D100U22-00	98.6	100	100	58	22	А	32 mm	Aluminum & Steel	2747100
	TXGSM40D125U28-00	123.6	125	125	58	28	А	40 mm	Aluminum & Steel	2747101


Minimum diameter guaranteed with standard inserts. Refer to related table of available cutting geometry for more detail.

Part number refers to body only, without inserts.






CYLINDRICAL SHANK END MILL WITH AXIAL ADJUSTMENT

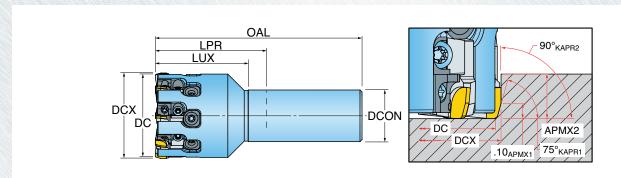

	Part Number ¹	DC (75°) Cutting Diameter	DC (90°) Cutting Diameter	DCX (75°) Cutting Diameter Max.	OAL Overall Length	ZEFF Eff. Teeth	Holder Shape	DCON Shank Diameter	BMC Body Material Code	Item
INCH	TXGSC01I015-07-00	1.44	1.5	1.5	3.94	7	Cylindrical	1.00	Steel	2742931
METRIC	TXGSC25D040U07-00	38.6	40	40	100	7	Cylindrical	25 mm	Steel	2747102

Minimum diameter guaranteed with standard inserts. Refer to related table of available cutting geometry for more detail. ¹ Part number refers to body only, without inserts.

MONOBLOCK MILL WITH AXIAL ADJUSTMENT

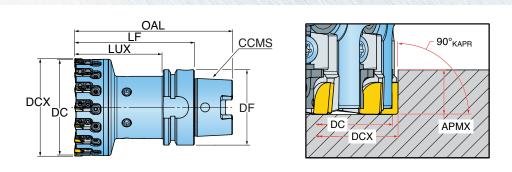


	Part Number ¹	DC (75°) Cutting Diameter	DC (90°) Cutting Diameter	DCX (75°) Cutting Diameter Max.	OAL Overall Length	ZEFF Eff. Teeth	Holder Shape	DCON Shank Diameter	BMC Body Material Code	ltem
U	TXGHA63D063-13-00	63	64.4	64.4	100	13	HSK 63 A	52	Steel	2748906
EI	TXGHA63D080-16-00	80	81.4	81.4	100	16	HSK 63 A	52	Steel	2748905
Σ	TXGHA63D100-22-00	100	101.4	101.4	100	22	HSK 63 A	52	Steel	2748907

Minimum diameter guaranteed with standard inserts. Refer to related table of available cutting geometry for more detail. ¹ Part number refers to body only, without inserts. Monoblock mills available upon request.





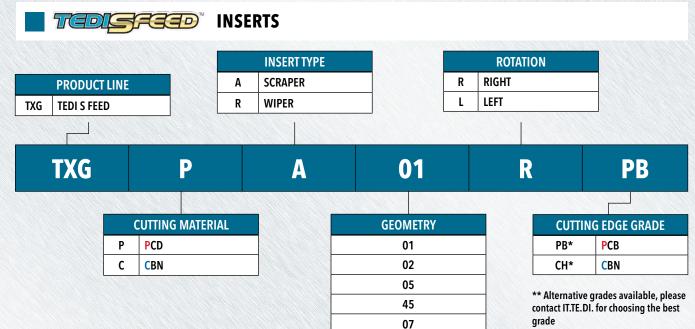





For finishing not square shoulder surfaces.

Achievable surface: 0.3 ≤ Ra ≤ 0.8



For finishing square shoulder surfaces.

Achievable surface: 0.3 ≤ Ra ≤ 0.8



For roughing or for cutting material with a high impurity content.

Achievable surface: 0.4 ≤ Ra ≤ 1



09

Suitable for finishing to medium roughing

Achievable surface: 0.4 ≤ Ra < 1



Suitable for semi-finishing rough surfaces

Achievable surface: 0.4 ≤ Ra < 1



Designed to provide rough surface for gasket retention

Achievable surface: $0.8 \le \text{Ra} \le 3.2$



PCD INSERTS







Part Number	Availability	Geometry	Rotation	Grade*	ltem
TXGPA01RPJ	Stock	01	R	РВ	2717188
TXGPA02RPJ	Stock	02	R	РВ	2717189
TXGPA05RPJ	Stock	05	R	РВ	2717190
TXGPA45RPJ	Stock	45	R	РВ	2747053
TXGPA07RPJ	Stock	07	R	PB	2717191
TXGPA09RPJ	Stock	09	R	PB	2724019

 $\label{thm:linear_problem} \mbox{Alternative grades available. Please contact IT.TE.DI. for choosing the best grade.}$



