



TBTA-H DRILL HEADS

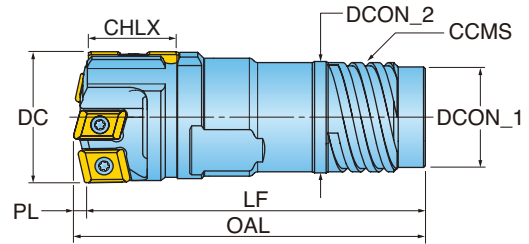

OUTER FOUR START THREAD



REFERENCE ITEMS

Description	DC Cutting Dia.	PL Point Length	CHLX Cross-hole Length Max.	LF Functional Length	OAL Overall Length	DCON_1 Connection Dia. 1	DCON_2 Connection Dia. 2	CCMS Connection Code Machine Side
TBTA-HX.XXXSE4-22	.984 - 1.039	0.118	0.55	2.756	2.874	0.768	0.768	BTA SE4-22
TBTA-HX.XXXSE4-24	1.040 - 1.129	0.118	0.55	2.756	2.874	0.827	0.827	BTA SE4-24
TBTA-HX.XXXSE4-26	1.130 - 1.220	0.118	0.55	2.953	3.071	0.925	0.925	BTA SE4-26
TBTA-HX.XXXSE4-28	1.221 - 1.311	0.118	0.55	2.953	3.071	1.004	1.004	BTA SE4-28
TBTA-HX.XXXSE4-30	1.312 - 1.425	0.118	0.55	3.150	3.268	1.102	1.102	BTA SE4-30
TBTA-HX.XXXSE4-33	1.426 - 1.559	0.118	0.55	3.543	3.661	1.181	1.181	BTA SE4-33
TBTA-HX.XXXSE4-36	1.560 - 1.692	0.158	0.77	3.740	3.898	1.299	1.299	BTA SE4-36
TBTA-HX.XXXSE4-39	1.693 - 1.850	0.157	0.77	3.937	4.094	1.417	1.417	BTA SE4-39
TBTA-HX.XXXSE4-43	1.851 - 2.035	0.157	0.83	3.937	4.094	1.535	1.535	BTA SE4-43
TBTA-HX.XXXSE4-47	2.036 - 2.212	0.157	0.83	4.331	4.488	1.693	1.693	BTA SE4-47
TBTA-HX.XXXSE4-51	2.213 - 2.385	0.196	0.83	4.528	4.724	1.870	1.870	BTA SE4-51
TBTA-HX.XXXSE4-56A	2.386 - 2.559	0.196	0.97	4.528	4.724	2.008	2.008	BTA SE4-56A
TBTA-HX.XXXSE4-56B	2.560 - 2.637	0.315	0.97	5.551	5.866	2.047	2.047	BTA SE4-56B
TBTA-HX.XXXSE4-62	2.638 - 2.874	0.315	0.97	5.551	5.866	2.283	2.283	BTA SE4-62
TBTA-HX.XXXSE4-68	2.875 - 3.149	0.355	0.97	5.551	5.906	2.480	2.480	BTA SE4-68
TBTA-HX.XXXSE4-75	3.150 - 3.268	0.354	0.97	6.457	6.811	2.756	2.756	BTA SE4-75