



TBTA-H DRILL HEADS

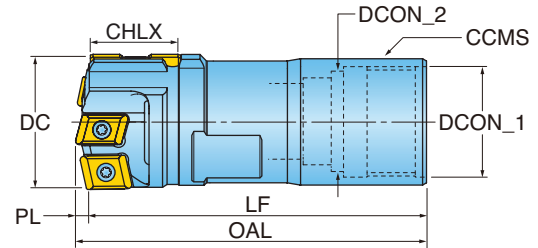

INNER SINGLE START THREAD



REFERENCE ITEMS

Description	DC Cutting Dia.	PL Point Length	CHLX Cross-hole Length Max.	LF Functional Length	OAL Overall Length	DCON_1 Connection Dia. 1	DCON_2 Connection Dia. 2	CCMS Connection Code Machine Side
TBTA-HX.XXXS11-22	.984 - 1.062	0.118	0.55	2.756	2.874	0.787	0.787	BTA SI1-22
TBTA-HX.XXXS11-24	1.063 - 1.141	0.118	0.55	2.756	2.874	0.866	0.866	BTA SI1-24
TBTA-HX.XXXS11-24	1.142 - 1.181	0.118	0.55	2.756	2.874	0.866	0.866	BTA SI1-24
TBTA-HX.XXXS11-26	1.182 - 1.259	0.118	0.55	2.953	3.071	0.945	0.945	BTA SI1-26
TBTA-HX.XXXS11-28	1.260 - 1.338	0.118	0.55	2.953	3.071	1.024	1.024	BTA SI1-28
TBTA-HX.XXXS11-30	1.339 - 1.456	0.118	0.55	3.543	3.661	1.063	1.063	BTA SI1-30
TBTA-HX.XXXS11-33	1.457 - 1.574	0.118	0.55	3.740	3.858	1.181	1.181	BTA SI1-33
TBTA-HX.XXXS11-36	1.575 - 1.732	0.157	0.77	3.937	4.094	1.299	1.299	BTA SI1-36
TBTA-HX.XXXS11-39	1.733 - 1.850	0.157	0.77	4.134	4.291	1.457	1.457	BTA SI1-39
TBTA-HX.XXXS11-43	1.851 - 2.047	0.157	0.83	4.134	4.291	1.614	1.614	BTA SI1-43
TBTA-HX.XXXS11-47	2.048 - 2.244	0.157	0.83	4.331	4.488	1.732	1.732	BTA SI1-47
TBTA-HX.XXXS11-51	2.245 - 2.401	0.196	0.83	4.528	4.724	1.929	1.929	BTA SI1-51
TBTA-HX.XXXS11-56	2.402 - 2.559	0.196	0.97	4.528	4.724	2.087	2.087	BTA SI1-56
TBTA-HX.XXXS11-56	2.560 - 2.667	0.315	0.97	4.094	4.409	2.087	2.087	BTA SI1-56
TBTA-HX.XXXS11-62	2.678 - 2.952	0.355	0.97	4.094	4.449	2.323	2.323	BTA SI1-62
TBTA-HX.XXXS11-68	2.953 - 3.189	0.354	0.97	5.276	5.630	2.559	2.559	BTA SI1-68
TBTA-HX.XXXS11-75	3.190 - 3.268	0.354	0.97	5.276	5.630	2.795	2.795	BTA SI1-75