

# Content

## LANDING PAGE

Scan the QR code to access detailed specifications, dimensional data, and the full product offering of the Ingersoll Precision Boring (IPB) System in our e-catalog.



## CROSS REFERENCE

This document provides a detailed, side-by-side comparison of components from the legacy boring system alongside their corresponding IPB equivalents.



## INSERTS

Ingersoll is continuously updating insert geometries and grades. Scan the QR code for the latest list of compatible insert offerings.



## ARBORS & ADAPTERS

|                               |    |
|-------------------------------|----|
| CAT.....                      | 4  |
| NMTB.....                     | 7  |
| MAS403-BT.....                | 8  |
| PSC/Capto.....                | 10 |
| HSK-A.....                    | 11 |
| DIN69871.....                 | 12 |
| DIN2080.....                  | 14 |
| Straight Shank - Steel.....   | 15 |
| Straight Shank - Carbide..... | 16 |

## EXTENSIONS & REDUCERS

|                             |    |
|-----------------------------|----|
| XT Extension.....           | 18 |
| RT Reducer.....             | 19 |
| Extended Reach Reducer..... | 20 |
| Anti-Vibration Reducer..... | 21 |

## HEADS

|                                                    |       |
|----------------------------------------------------|-------|
| Roughing Heads.....                                | 22    |
| Metric Dial (2µm) Fine Boring Heads.....           | 24-29 |
| Inch Dial (.0001") Fine Boring Heads.....          | 24-29 |
| Digital Display Fine Boring Heads.....             | 29    |
| Metric Dial (2µm) Dovetail Fine Boring Heads.....  | 30-35 |
| Inch Dial (.0001") Dovetail Fine Boring Heads..... | 30-35 |

## CARTRIDGES, BORING BARS, SLIDES

|                                                     |    |
|-----------------------------------------------------|----|
| Standard Roughing Cartridges (C Type Inserts).....  | 36 |
| Roughing Cartridges (15°).....                      | 38 |
| Roughing Cartridges (T Type Inserts).....           | 39 |
| Backboring Roughing Cartridges.....                 | 40 |
| Standard Finishing Cartridges (C Type Inserts)..... | 41 |
| Standard Finishing Cartridges (T Type Inserts)..... | 42 |
| Backboring Finishing Cartridges.....                | 43 |
| Boring Bars Finishing                               |    |
| Small Diameter Carbide (5xD).....                   | 44 |
| Steel (3xD).....                                    | 45 |
| Heavy Metal (5xD).....                              | 46 |
| Carbide (8xD).....                                  | 47 |
| Holder for AFH (Dovetail).....                      | 48 |
| Dovetail Slides Finishing.....                      | 49 |
| Dovetail Holders Finishing.....                     | 50 |
| Holders for AFH/DFH - IPB50.....                    | 50 |
| Serrated Slides Finishing.....                      | 51 |
| Counterweight.....                                  | 51 |

## KITS

|                             |    |
|-----------------------------|----|
| Analog Finishing Kits.....  | 52 |
| Digital Finishing Kits..... | 58 |

## ACCESSORIES & SPARE PARTS


|                             |    |
|-----------------------------|----|
| ER Collet.....              | 59 |
| Side Lock.....              | 60 |
| Face Mill Drivers.....      | 61 |
| Reducer Sleeves.....        | 62 |
| Expanding Pin Coupling..... | 63 |
| Spare Parts.....            | 64 |

## OPERATING GUIDELINES

|                |    |
|----------------|----|
| Roughing.....  | 66 |
| Finishing..... | 67 |

## Series IPB-SCG\_ - Rough Cartridge

### FOR USE WITH RH ROUGHING HEADS

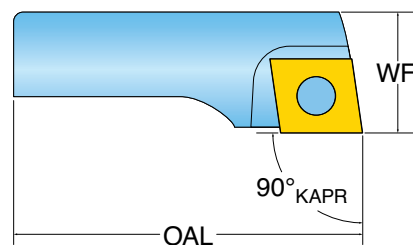

| Part Number    | WF<br>Funct. Width | OAL<br>Overall Length | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|----------------|--------------------|-----------------------|-------------------------|--------------------|
| <b>INCH</b>    |                    |                       |                         |                    |
| SCGC-06-16-IPB | 0.32               | 0.59                  | CCMT 0602..             | 0.010              |
| SCGC-06-20-IPB | 0.37               | 0.75                  | CCMT 0602..             | 0.010              |
| SCGC-06-25-IPB | 0.49               | 0.91                  | CCMT 0602..             | 0.020              |
| SCGC-06-32-IPB | 0.59               | 1.26                  | CCMT 0602..             | 0.040              |
| SCGC-09-33-IPB | 0.59               | 1.26                  | CCMT 09T3..             | 0.060              |
| SCGC-09-40-IPB | 0.75               | 1.74                  | CCMT 09T3..             | 0.130              |
| SCGC-12-41-IPB | 0.75               | 1.57                  | CCMT 1204..             | 0.130              |
| SCGC-12-50-IPB | 0.87               | 2.13                  | CCMT 1204..             | 0.220              |
| SCGC-12-63-IPB | 1.06               | 2.78                  | CCMT 1204..             | 0.440              |
| SCGC-12-80-IPB | 1.26               | 3.72                  | CCMT 1204..             | 1.100              |
| SCGC-12-90-IPB | 1.26               | 5.12                  | CCMT 1204..             | 1.540              |
| SCGN-19-95-IPB | 1.57               | 5.12                  | CNMG 1906..             | 1.980              |


Spare Parts - Page 64

Scan for  
inserts >



## Series IPB-SCGC\_RH - Rough Cartridge

### FOR USE WITH RH ROUGHING HEADS

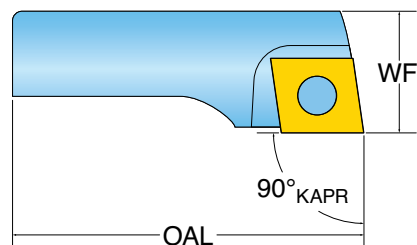

| Part Number       | WF<br>Funct. Width | OAL<br>Overall Length | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|-------------------|--------------------|-----------------------|-------------------------|--------------------|
| <b>INCH</b>       |                    |                       |                         |                    |
| SCGC-06-25-IPB-RH | 0.48               | 0.91                  | CCMT 0602..             | 0.020              |
| SCGC-06-32-IPB-RH | 0.58               | 1.26                  | CCMT 0602..             | 0.040              |
| SCGC-09-33-IPB-RH | 0.58               | 1.26                  | CCMT 09T3..             | 0.060              |
| SCGC-09-40-IPB-RH | 0.74               | 1.57                  | CCMT 09T3..             | 0.130              |
| SCGC-12-41-IPB-RH | 0.74               | 1.57                  | CCMT 1204..             | 0.130              |
| SCGC-12-50-IPB-RH | 0.85               | 2.13                  | CCMT 1204..             | 0.220              |
| SCGC-12-63-IPB-RH | 1.05               | 2.78                  | CCMT 1204..             | 0.440              |
| SCGC-12-80-IPB-RH | 1.25               | 3.72                  | CCMT 1204..             | 1.100              |
| SCGC-12-90-IPB-RH | 1.25               | 5.12                  | CCMT 1204..             | 1.540              |

Spare Parts - Page 64


\*Use with series IPB-SCG\_ for staggered roughing

Scan for  
inserts >



## Series IPB-SSR\_ - 15° Rough Cartridge

### FOR USE WITH RH ROUGHING HEADS

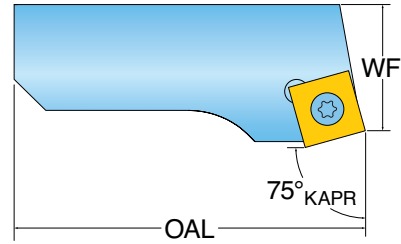

| Part Number    | WF<br>Funct. Width | OAL<br>Overall Length | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|----------------|--------------------|-----------------------|-------------------------|--------------------|
| <b>INCH</b>    |                    |                       |                         |                    |
| SSRC-09-32-IPB | 0.59               | 1.26                  | SCMT 09T3..             | 0.040              |
| SSRC-09-40-IPB | 0.75               | 1.57                  | SCMT 09T3..             | 0.130              |
| SSRC-12-50-IPB | 0.81               | 2.13                  | SCMT 1204..             | 0.220              |
| SSRC-12-63-IPB | 1.06               | 2.78                  | SCMT 1204..             | 0.440              |
| SSRC-12-80-IPB | 1.26               | 3.72                  | SCMT 1204..             | 1.100              |
| SSRC-12-90-IPB | 1.26               | 5.12                  | SCMT 1204..             | 1.540              |
| SSRN-19-90-IPB | 1.57               | 5.12                  | SNM_1906                | 1.980              |


Spare Parts - Page 64

Scan for  
inserts >



## Series IPB-STG\_ - Rough Cartridge

FOR USE WITH RH ROUGHING HEADS

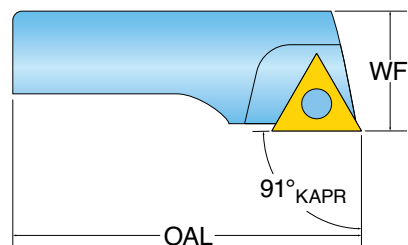

| Part Number    | WF<br>Funct. Width | OAL<br>Overall Length | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|----------------|--------------------|-----------------------|-------------------------|--------------------|
| <b>INCH</b>    |                    |                       |                         |                    |
| STGC-22-63-IPB | 1.06               | 2.78                  | TCMT 2204..             | 0.440              |
| STGC-22-80-IPB | 1.26               | 3.72                  | TCMT 2204..             | 1.100              |
| STGC-22-90-IPB | 1.26               | 5.12                  | TCMT 2204..             | 1.540              |


Spare Parts - Page 64

Scan for  
inserts >



## Series IPB-SCXC - Back Bore Rough Cartridge

### FOR USE WITH RH ROUGHING HEADS

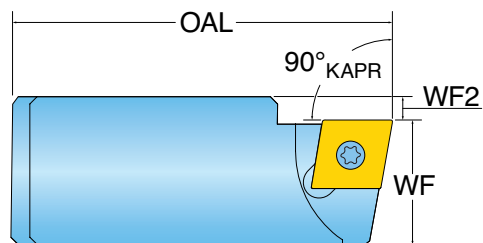

| Part Number    | WF<br>Funct. Width | WF2<br>Funct. Width 2 | OAL<br>Overall Length | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|----------------|--------------------|-----------------------|-----------------------|-------------------------|--------------------|
| <b>INCH</b>    |                    |                       |                       |                         |                    |
| SCXC-06-16-IPB | 0.39               | 0.08                  | 0.63                  | CCMT 0602..             | 0.010              |
| SCXC-06-20-IPB | 0.43               | 0.06                  | 0.77                  | CCMT 0602..             | 0.020              |
| SCXC-06-25-IPB | 0.57               | 0.10                  | 0.94                  | CCMT 0602..             | 0.040              |
| SCXC-09-32-IPB | 0.67               | 0.12                  | 1.26                  | CCMT 09T3..             | 0.070              |
| SCXC-12-40-IPB | 0.83               | 0.14                  | 1.65                  | CCMT 1204..             | 0.180              |
| SCXC-12-50-IPB | 0.96               | 0.14                  | 2.24                  | CCMT 1204..             | 0.330              |
| SCXC-12-63-IPB | 0.98               | 0.14                  | 2.99                  | CCMT 1204..             | 0.660              |
| SCXC-12-80-IPB | 1.24               | 0.14                  | 3.98                  | CCMT 1204..             | 1.320              |
| SCXC-12-90-IPB | 1.10               | 0.14                  | 4.88                  | CCMT 1204..             | 1.760              |


Spare Parts - Page 64

Scan for  
inserts >



## Series IPB-FH\_SCGC - Finish Cartridge

### USE WITH AFH/DFH HEADS

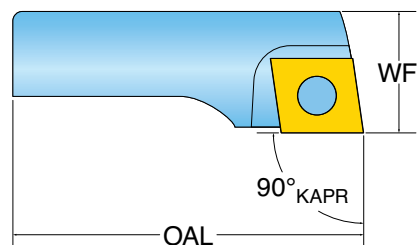

| Part Number       | WF<br>Funct. Width | OAL<br>Overall Length | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|-------------------|--------------------|-----------------------|-------------------------|--------------------|
| <b>INCH</b>       |                    |                       |                         |                    |
| FH-SCGC-06-16-IPB | 0.32               | 0.70                  | CCxT 0602               | 0.010              |
| FH-SCGC-06-20-IPB | 0.34               | 0.83                  | CCxT 0602               | 0.010              |
| FH-SCGC-06-25-IPB | 0.39               | 1.40                  | CCxT 0602               | 0.020              |
| FH-SCGC-06-32-IPB | 0.45               | 1.36                  | CCxT 0602               | 0.040              |
| FH-SCGC-09-40-IPB | 0.55               | 1.73                  | CCxT 09T3               | 0.090              |
| FH-SCGC-09-50-IPB | 0.75               | 2.05                  | CCxT 09T3               | 0.200              |


Spare Parts - Page 64

Scan for  
inserts >



# Series IPB-FH-STGP - Finish Cartridge

USE WITH AFH/DFH HEADS

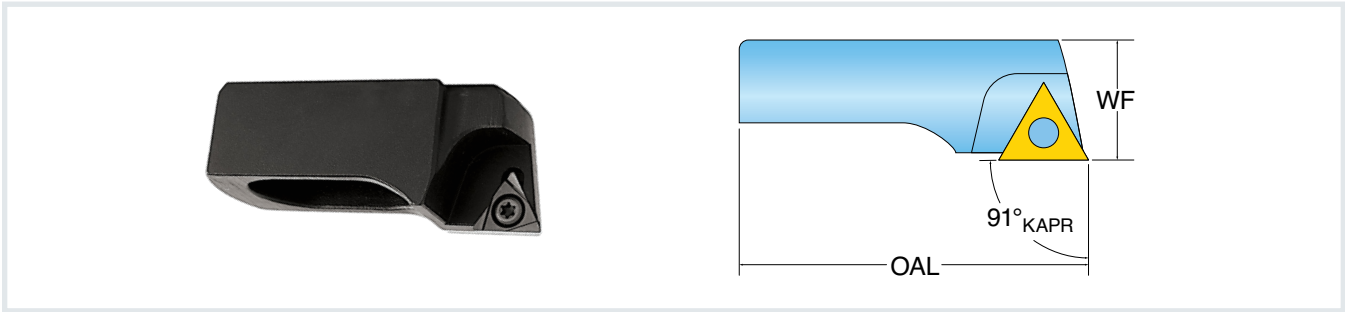

| Part Number       | WF<br>Funct. Width | OAL<br>Overall Length | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|-------------------|--------------------|-----------------------|-------------------------|--------------------|
| INCH              |                    |                       |                         |                    |
| FH-STGP-09-25-IPB | 0.39               | 1.04                  | TPGX 0902..             | 0.020              |
| FH-STGP-09-32-IPB | 0.45               | 1.36                  | TPGX 0902..             | 0.040              |
| FH-STGP-11-40-IPB | 0.55               | 1.73                  | TPGX 1103..             | 0.090              |
| FH-STGP-11-50-IPB | 0.75               | 2.05                  | TPGX 1103..             | 0.200              |


Spare Parts - Page 64

Scan for  
inserts >



## Series IPB-FH\_SCXC - Back Bore Finishing Cartridge

### USE WITH AFH/DFH HEADS

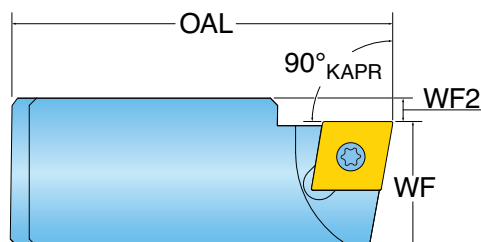

| Part Number       | WF<br>Funct. Width | WF2<br>Funct. Width 2 | OAL<br>Overall Length | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|-------------------|--------------------|-----------------------|-----------------------|-------------------------|--------------------|
| <b>INCH</b>       |                    |                       |                       |                         |                    |
| FH-SCXC-06-16-IPB | 0.39               | 0.08                  | 0.71                  | CCxT 0602               | 0.010              |
| FH-SCXC-06-20-IPB | 0.41               | 0.08                  | 0.89                  | CCxT 0602               | 0.020              |
| FH-SCXC-06-25-IPB | 0.47               | 0.10                  | 1.12                  | CCxT 0602               | 0.020              |
| FH-SCXC-06-32-IPB | 0.53               | 0.10                  | 1.40                  | CCxT 0602               | 0.070              |
| FH-SCXC-09-40-IPB | 0.65               | 0.12                  | 1.81                  | CCxT 09T3               | 0.130              |
| FH-SCXC-09-50-IPB | 0.81               | 0.12                  | 2.09                  | CCxT 09T3               | 0.220              |

Spare Parts - Page 64

Scan for  
inserts >



## Series IPB-5X - Small Diameter Carbide Boring Bar

Ø .098-.236" (2.5-6.0 MM)




| Part Number     | DCN<br>Cutting<br>Diameter<br>Min. | DCX<br>Cutting<br>Diameter<br>Max. | DCON<br>Connection<br>Diameter | LS<br>Shank Length | LF<br>Funct. Length | LDRED<br>Reduced Body<br>Diameter<br>Length | WT<br>Weight (lbs) |
|-----------------|------------------------------------|------------------------------------|--------------------------------|--------------------|---------------------|---------------------------------------------|--------------------|
| INCH (METRIC)   |                                    |                                    |                                |                    |                     |                                             |                    |
| IPB-5X-E2.5-4-8 | 0.098<br>(2.5 mm)                  | 0.157<br>(4.0 mm)                  | 8 mm                           | 0.87<br>(22.1 mm)  | 1.690<br>(42.9 mm)  | 0.492<br>(12.5 mm)                          | 0.04               |
| IPB-5X-E4-6-8   | 0.157<br>(4.0 mm)                  | 0.236<br>(6.0 mm)                  | 8 mm                           | 0.94<br>(24.0 mm)  | 1.890<br>(48.0 mm)  | 0.787<br>(20.0 mm)                          | 0.04               |

Spare Parts - Page 64

## Series IPB-3X - Steel Boring Bar

Ø .236-1.180" (6.0-30.0 MM)

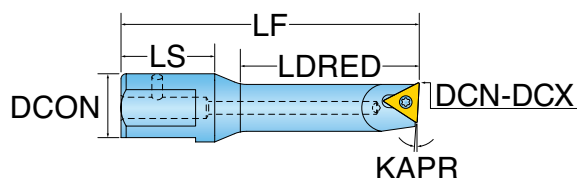

| Part Number          | DCN<br>Cutting<br>Diameter<br>Min. | DCX<br>Cutting<br>Diameter<br>Max. | LF<br>Funct.<br>Length | LDRED<br>Reduced<br>Body<br>Diameter<br>Length | LS<br>Shank<br>Length | DCON<br>Connection<br>Code Machine<br>Size | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|----------------------|------------------------------------|------------------------------------|------------------------|------------------------------------------------|-----------------------|--------------------------------------------|-------------------------|--------------------|
| <b>INCH (METRIC)</b> |                                    |                                    |                        |                                                |                       |                                            |                         |                    |
| IPB-3X-A6-8-W02      | 0.236<br>(6.0 mm)                  | 0.315<br>(8.0 mm)                  | 2.000<br>(50.8 mm)     | 0.827<br>(21.0 mm)                             | 0.870                 | Shank 16 mm                                | WCGT 0201..             | 0.08               |
| IPB-3X-A8-10-W02     | 0.315<br>(8.0 mm)                  | 0.393<br>(10.0 mm)                 | 2.280<br>(57.9 mm)     | 1.102<br>(28.0 mm)                             | 0.870                 | Shank 16 mm                                | WCGT 0201..             | 0.09               |
| IPB-3X-A10-12-T09    | 0.394<br>(10.0 mm)                 | 0.472<br>(12.0 mm)                 | 2.560<br>(65.0 mm)     | 1.380<br>(35.1 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.11               |
| IPB-3X-A11-13-T09    | 0.433<br>(11.0 mm)                 | 0.512<br>(13.0 mm)                 | 2.750<br>(69.9 mm)     | 1.570<br>(39.9 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.12               |
| IPB-3X-A12-14-T09    | 0.472<br>(12.0 mm)                 | 0.551<br>(14.0 mm)                 | 2.750<br>(69.9 mm)     | 1.650<br>(41.9 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.13               |
| IPB-3X-A14-16-T09    | 0.551<br>(14.0 mm)                 | 0.630<br>(16.0 mm)                 | 2.910<br>(73.9 mm)     | 1.970<br>(50.0 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.15               |
| IPB-3X-A16-18-T09    | 0.630<br>(16.0 mm)                 | 0.708<br>(18.0 mm)                 | 3.150<br>(80.0 mm)     | 1.970<br>(50.0 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.15               |
| IPB-3X-A18-22-T09    | 0.708<br>(18.0 mm)                 | 0.866<br>(22.0 mm)                 | 3.350<br>(85.1 mm)     | - (-)                                          | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.22               |
| IPB-3X-A22-30-T09    | 0.866<br>(22.0 mm)                 | 1.180<br>(30.0 mm)                 | 3.540<br>(89.9 mm)     | - (-)                                          | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.22               |


Spare Parts - Page 64

Scan for  
inserts >



## Series IPB-5X - Heavy Metal Boring Bar

Ø .236-.708" (6.0-18.0 MM)

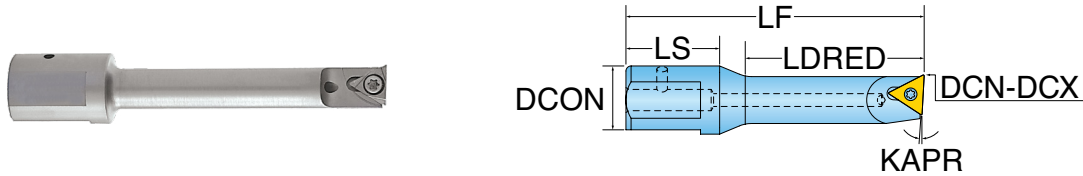

| Part Number          | DCN<br>Cutting<br>Diameter<br>Min. | DCX<br>Cutting<br>Diameter<br>Max. | LF<br>Funct.<br>Length | LDRED<br>Reduced<br>Body<br>Diameter<br>Length | LS<br>Shank<br>Length | DCON<br>Connection<br>Code Machine<br>Size | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|----------------------|------------------------------------|------------------------------------|------------------------|------------------------------------------------|-----------------------|--------------------------------------------|-------------------------|--------------------|
| <b>INCH (METRIC)</b> |                                    |                                    |                        |                                                |                       |                                            |                         |                    |
| IPB-5X-H6-8-W02      | 0.236<br>(6.0 mm)                  | 0.315<br>(8.0 mm)                  | 2.280<br>(57.9 mm)     | 1.417<br>(36.0 mm)                             | 0.870                 | Shank 16 mm                                | WCGT 0201..             | 0.17               |
| IPB-5X-H8-10-W02     | 0.315<br>(8.0 mm)                  | 0.393<br>(10.0 mm)                 | 2.760<br>(70.1 mm)     | 1.890<br>(48.0 mm)                             | 0.870                 | Shank 16 mm                                | WCGT 0201..             | 0.20               |
| IPB-5X-H10-12-T09    | 0.393<br>(10.0 mm)                 | 0.472<br>(12.0 mm)                 | 3.230<br>(82.0 mm)     | 2.360<br>(59.9 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.22               |
| IPB-5X-H12-14-T09    | 0.472<br>(12.0 mm)                 | 0.551<br>(14.0 mm)                 | 3.700<br>(94.0 mm)     | 2.830<br>(71.9 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.22               |
| IPB-5X-H14-16-T09    | 0.551<br>(14.0 mm)                 | 0.630<br>(16.0 mm)                 | 4.170<br>(105.9 mm)    | 3.307<br>(84.0 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.44               |
| IPB-5X-H16-18-T09    | 0.630<br>(16.0 mm)                 | 0.708<br>(18.0 mm)                 | 4.650<br>(118.1 mm)    | 3.780<br>(96.0 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.66               |


Spare Parts - Page 64

Scan for  
inserts >



## Series IPB-8X - Carbide Boring Bar

Ø .236-.708" (6.0-18.0 MM)

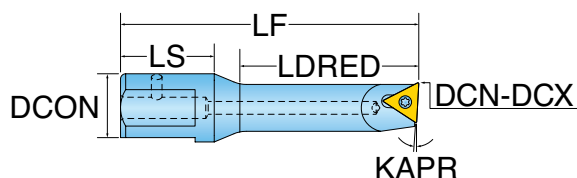

| Part Number          | DCN<br>Cutting<br>Diameter<br>Min. | DCX<br>Cutting<br>Diameter<br>Max. | LF<br>Funct.<br>Length | LDRED<br>Reduced<br>Body<br>Diameter<br>Length | LS<br>Shank<br>Length | DCON<br>Connection<br>Code Machine<br>Size | INSERT<br>Insert Series | WT<br>Weight (lbs) |
|----------------------|------------------------------------|------------------------------------|------------------------|------------------------------------------------|-----------------------|--------------------------------------------|-------------------------|--------------------|
| <b>INCH (METRIC)</b> |                                    |                                    |                        |                                                |                       |                                            |                         |                    |
| IPB-8X-E6-8-W02      | 0.236<br>(6.0 mm)                  | 0.315<br>(8.0 mm)                  | 2.640<br>(67.1 mm)     | 1.770<br>(45.0 mm)                             | 0.870                 | Shank 16 mm                                | WCGT 0201..             | 0.14               |
| IPB-8X-E8-10-W02     | 0.315<br>(8.0 mm)                  | 0.393<br>(10.0 mm)                 | 3.230<br>(82.0 mm)     | 2.360<br>(59.9 mm)                             | 0.870                 | Shank 16 mm                                | WCGT 0201..             | 0.18               |
| IPB-8X-E10-12-T09    | 0.393<br>(10.0 mm)                 | 0.472<br>(12.0 mm)                 | 3.819<br>(97.0 mm)     | 2.950<br>(74.9 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.22               |
| IPB-8X-E12-14-T09    | 0.472<br>(12.0 mm)                 | 0.551<br>(14.0 mm)                 | 4.409<br>(112.0 mm)    | 3.540<br>(89.9 mm)                             | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.44               |
| IPB-8X-E14-16-T09    | 0.551<br>(14.0 mm)                 | 0.630<br>(16.0 mm)                 | 5.000<br>(127.0 mm)    | 4.133<br>(105.0 mm)                            | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.44               |
| IPB-8X-E16-18-T09    | 0.630<br>(16.0 mm)                 | 0.708<br>(18.0 mm)                 | 5.590<br>(142.0 mm)    | 4.724<br>(120.0 mm)                            | 0.870                 | Shank 16 mm                                | TPGX 0902..             | 0.66               |


Spare Parts - Page 64

Scan for  
inserts >



# Series IPB-FH\_SLV

## BORING BAR HOLDER FOR AFH (DOVETAIL)

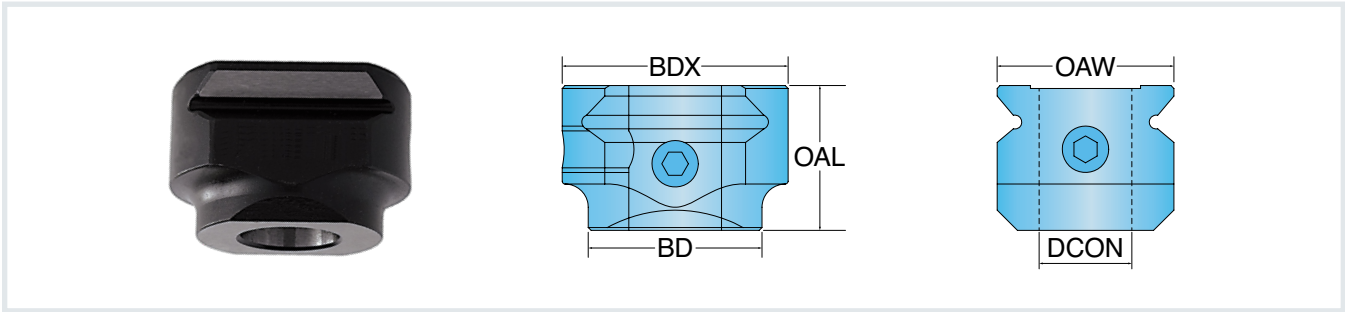


| Part Number  | BD<br>Body Diameter | BDX<br>Body Diameter<br>Max. | OAL<br>Overall Length | OAW<br>Overall Width | DCON<br>Connection<br>Diameter | WT<br>Weight (lbs) |
|--------------|---------------------|------------------------------|-----------------------|----------------------|--------------------------------|--------------------|
| INCH         |                     |                              |                       |                      |                                |                    |
| FH-SLV-30-16 | 1.180               | 1.540                        | 0.980                 | 1.200                | 16.00 mm                       | 0.440              |

Spare Parts - Page 64

## Series IPB-FH\_SLD for AFH (Dovetail)

### SLIDE FOR AFH (DOVETAIL)


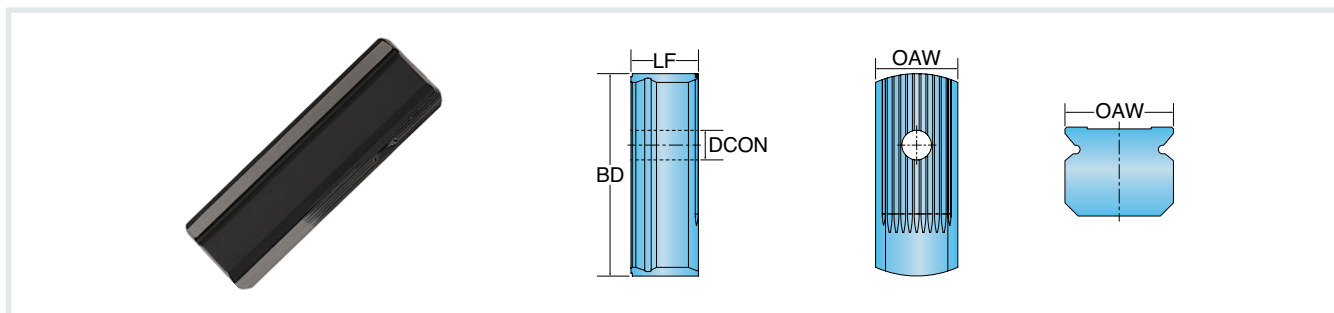


| Part Number   | DCN<br>Cutting Diameter<br>Min. | DCX<br>Cutting Diameter<br>Max. | BD<br>Body Diameter | OAW<br>Overall Width | LF<br>Funct. Length | WT<br>Weight (lbs) |
|---------------|---------------------------------|---------------------------------|---------------------|----------------------|---------------------|--------------------|
| <b>INCH</b>   |                                 |                                 |                     |                      |                     |                    |
| FH-SLD-30-75  | 3.030                           | 3.940                           | 2.952               | 1.200                | 0.984               | 0.881              |
| FH-SLD-30-93  | 3.700                           | 4.920                           | 3.661               | 1.200                | 0.984               | 1.102              |
| FH-SLD-30-135 | 5.510                           | 6.300                           | 5.314               | 1.200                | 0.984               | 1.543              |
| FH-SLD-40-133 | 5.310                           | 8.270                           | 5.236               | 1.574                | 1.574               | 3.306              |
| FH-SLD-40-200 | 8.070                           | 12.200                          | 7.874               | 1.574                | 1.574               | 5.291              |
| FH-SLD-40-300 | 12.010                          | 16.140                          | 11.811              | 1.574                | 1.574               | 7.716              |
| FH-SLD-40-400 | 15.940                          | 19.690                          | 15.748              | 1.574                | 1.574               | 10.141             |

Spare Parts - Page 64

## Series IPB-FH\_SLDE for AFH (Dovetail)

### HOLDER FOR AFH (DOVETAIL)





Note: LPR + WF (cartridge) = LF (assembly)

| Part Number    | BD<br>Body Diameter | BDX<br>Body Diameter<br>Max. | OAW<br>Overall Width | LB<br>Body Length | LPR<br>Protruding<br>Length | WT<br>Weight (lbs) |
|----------------|---------------------|------------------------------|----------------------|-------------------|-----------------------------|--------------------|
| <b>INCH</b>    |                     |                              |                      |                   |                             |                    |
| FH-SLDE-30-40  | 0.984               | 1.692                        | 1.200                | 1.574             | 2.07                        | 0.660              |
| FH-SLDE-30-70  | 0.984               | 1.692                        | 1.200                | 2.755             | 3.25                        | 0.880              |
| FH-SLDE-30-115 | 1.062               | 1.692                        | 1.200                | 4.527             | 5.02                        | 1.540              |
| FH-SLDE-40-69  | 1.259               | 2.204                        | 1.574                | 2.716             | 3.39                        | 1.540              |
| FH-SLDE-40-114 | 1.259               | 2.204                        | 1.574                | 4.488             | 5.16                        | 2.200              |
| FH-SLDE-40-189 | 1.496               | 2.204                        | 1.574                | 7.440             | 8.11                        | 4.410              |

Spare Parts - Page 64

## Series IPB-FH\_SLB

### HOLDER FOR AFH & DFH -IPB50




Note: LPR + WF (cartridge) = LF (assembly)

| Part Number  | BD<br>Body Diameter | LPR<br>Protruding Length | LS<br>Shank Length | WT<br>Weight (lbs) |
|--------------|---------------------|--------------------------|--------------------|--------------------|
| <b>INCH</b>  |                     |                          |                    |                    |
| FH-SLB-16-53 | 0.984               | 2.09                     | 0.840              | 1.100              |
| FH-SLB-16-95 | 0.984               | 3.74                     | 0.840              | 1.700              |

Spare Parts - Page 64

## Series IPB-FH\_SLD (Serrated)

### SERRATED SLIDE FOR AFH & DFH - IPB50

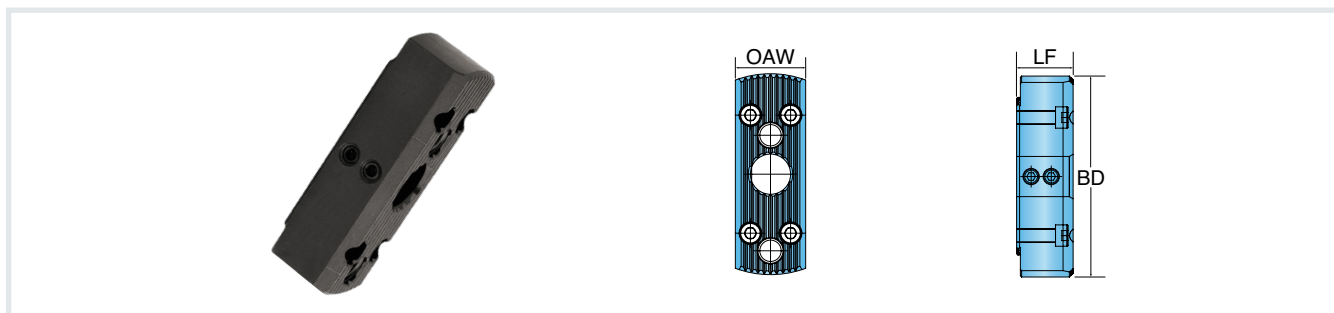


| Part Number   | BD<br>Body Diameter | OAW<br>Overall Width | LF<br>Funct. Length | WT<br>Weight (lbs) |
|---------------|---------------------|----------------------|---------------------|--------------------|
| <b>INCH</b>   |                     |                      |                     |                    |
| FH-SLD-24-75  | 2.950               | 0.940                | 0.570               | 0.419              |
| FH-SLD-24-100 | 3.940               | 0.940                | 0.570               | 0.440              |

Spare Parts - Page 64

## Series IPB-CW Counterweight

### USED WITH AFH50/DFH50 FINE BORING HEADS

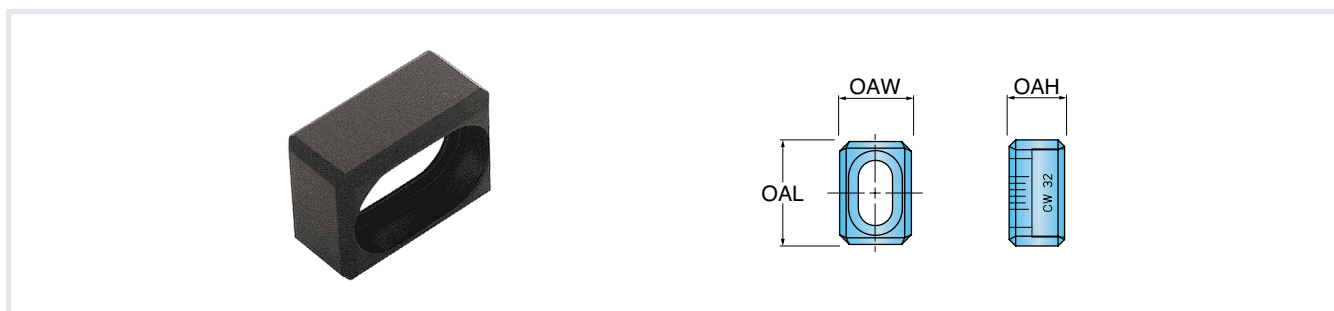

| Part Number | OAW<br>Overall Width | OAH<br>Overall Height | OAL<br>Overall Length | WT<br>Weight (lbs) |
|-------------|----------------------|-----------------------|-----------------------|--------------------|
| <b>INCH</b> |                      |                       |                       |                    |
| CW32        | 0.870                | 0.670                 | 1.240                 | 1.100              |

Spare Parts - Page 64