



Holders

- Inch (.500" and .625")
- Metric (12mm and 16mm)
(CNMG Holders only)

Inserts

- CNMG 33x
- CNGG 33x (Peripheral Ground)
- DNMG 3.53.5x
- DNGG 3.53.5x (Peripheral Ground)
- DNUX 3.53.5x
- VNMX 2.53x
- VNGX 2.53x (Peripheral Ground)
- YNMG 2.53x
- Refer to website & catalog for nearly 500 inserts to choose from



Rhino-Turn Holders for Swiss Applications Now Expanded to DNMG and VNMX Inserts


Features and Benefits

- Double sided inserts
- Now available for CNMG, DNMG, VNMX & YNMG inserts
- H-Type holders provide convenient, fast insert changes
- Hook Lever design provides very stable, multi-directional clamping
- Thicker inserts provide heat dissipation through a wider cross section for longer tool life

Gold-Rhino
Standard Holder




Gold-Rhino
Swiss-Turn Holder

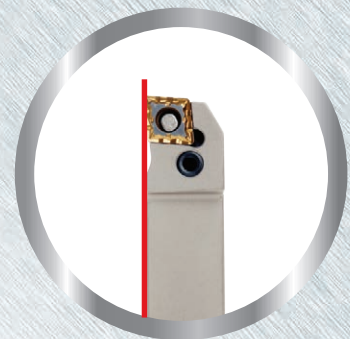

Each Rhino-Turn Swiss holder features an in-line design, and utilizes a very stable, "hook lever" clamping system that provides excellent rigidity. The result is reduced vibration during machining, extended tool life of the insert and outstanding performance.



RHINO[®]TURN™ HCLNR/L-SH (LEVER LOCK)

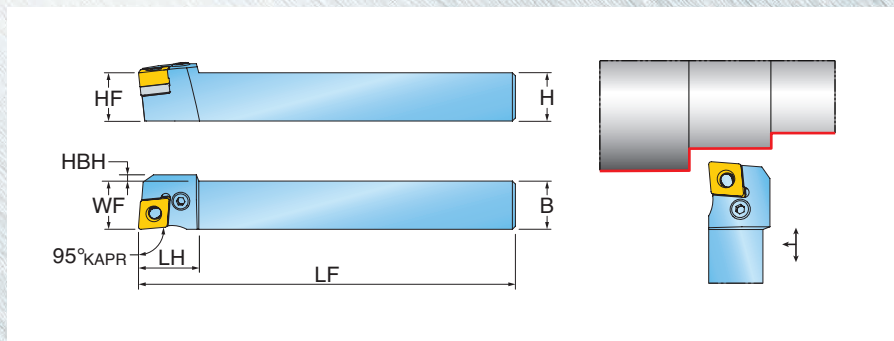

Inch Holders

Part Number	Hand		Dimension (inch)							Insert
	R	L	H Shank Height	HF Functional Height	B Shank Width	WF Functional Width	LF Functional Length	HBKW Head Back Offset Width	LH Head Length	
HCLNR/L 08-33C-SH	•	•	.500	.500	.500	.500	5.0	.079	.709	 CNMG 33 ☐ CNGG 33 ☐
HCLNR/L 10-33C-SH	•	•	.625	.625	.625	.625	5.0	-	.787	


Metric Holders

Part Number	Hand		Dimension (mm)							Insert
	R	L	H Shank Height	HF Functional Height	B Shank Width	WF Functional Width	LF Functional Length	HBKW Head Back Offset Width	LH Head Length	
HCLNR/L 1212K0904-RS	•	•	12	12	12	12	125	2	18	 CNMG 33 ☐ CNGG 33 ☐
HCLNR/L 1616K0904-RS	•	•	16	16	16	16	125	-	20	

Spare Parts

Holder Part Number	Components					
	Lever	Lever Screw	Shim	Shim Pin	Snap Ring	Wrench
HCLNR/L 08-33C-SH						
HCLNR/L 1212K0904-RS	LCL 09B-NX	LCS 3B	-	-	LSR 3B	L-W 2
HCLNR/L 10-33C-SH	LCL 09-NX	LCS 3	LSC 32A	LSP 3A	-	L-W 2.5
HCLNR/L 1616K0904-RS						

RHINO[®]TURN™ HDJNR/L-SH (LEVER LOCK)

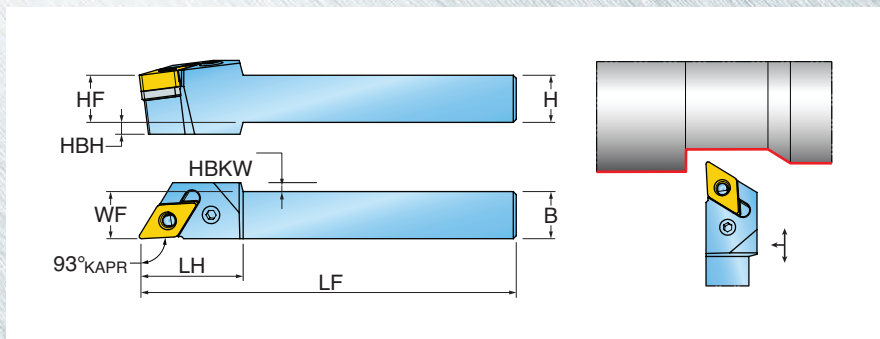


Inch Holders

Part Number	Hand		Dimension (inch)								Insert
	R	L	H Shank Height	HF Functional Height	B Shank Width	WF Functional Width	LF Functional Length	HBH Head Bottom Offset Height	HBKW Head Back Offset Width	LH Head Length	
HDJNR/L 10-3.53.5C-SH	•	•	.625	.625	.625	.625	5.0	0.197	.118	1.38	 DNGG 3.53.5 □ DNMG 3.53.5 □ DNUX 3.53.5 □

Spare Parts

Holder Part Number	Components				
	Lever 	Lever Screw 	Shim 	Shim Pin 	Wrench 
HDJNR/L 10-3.53.5C-SH	LCL 11-NX	LCS 4	LSD 3.52	LSP 4	L-W 3-19

SDJNR/L-SH (SCREW HELD)

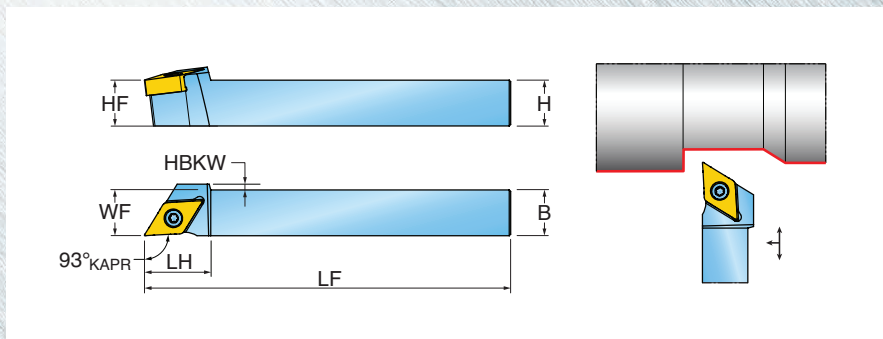


Inch Holders

Part Number	Hand		Dimension (inch)							Insert
	R	L	H Shank Height	HF Functional Height	B Shank Width	WF Functional Width	LF Functional Length	HBKW Head Back Offset Width	LH Head Length	
SDJNR/L 08-3.53.5C-SH	•	•	.500	.500	.500	.500	5.0	.157	.906	 DNCG 3.53.5 □ DNMG 3.53.5 □ DNUX 3.53.5 □
SDJNR/L 10-3.53.5C-SH	•	•	.625	.625	.625	.625	5.0	.079	.906	

Spare Parts

Holder Part Number	Components	
	Insert Screw	Wrench
SDJNR/L 08-3.53.5C-SH	 TS40 G110I	 T15
SDJNR/L 10-3.53.5C-SH		

RHINO[®]TURN™ HVJNR/L-SH (LEVER LOCK)

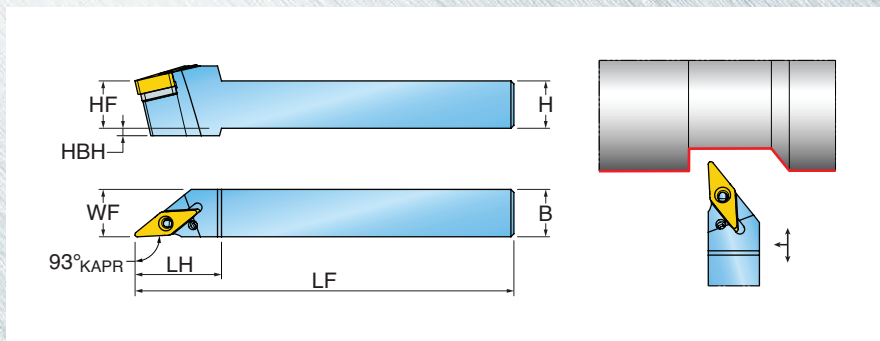

Inch Holders

Part Number	Hand		Dimension (inch)							Insert
	R	L	H Shank Height	HF Functional Height	B Shank Width	WF Functional Width	LF Functional Length	HBH Head Bottom Offset Height	LH Head Length	
HVJNR/L 10-2.53C-SH	•	•	.625	.625	.625	.625	5.0	0.984	1.14	 VNGX 2.53 ☐ VNMX 2.53 ☐ YNMG 2.53 ☐

Spare Parts

Holder Part Number	Components				
	Lever 	Lever Screw 	Shim 	Shim Pin 	Wrench 
HVJNR/L 10-2.53C-SH	LCL 08-NX	LCS 4-DH	LSV 2.51.8H	LSP 3B	L-W 2.5-112